
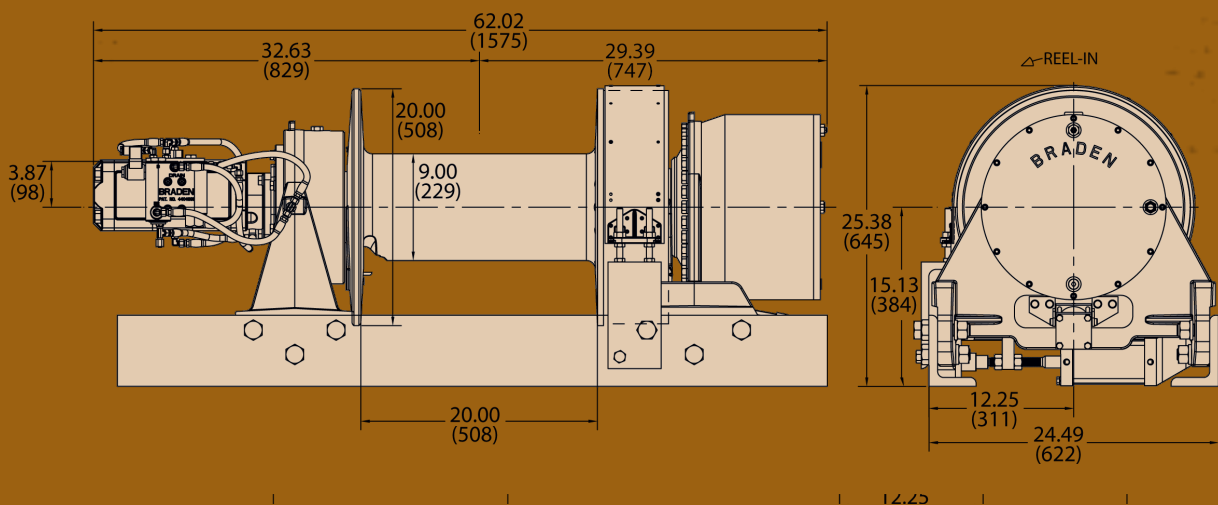


# MAGNUM

MANUFACTURED BY **BRADEN**

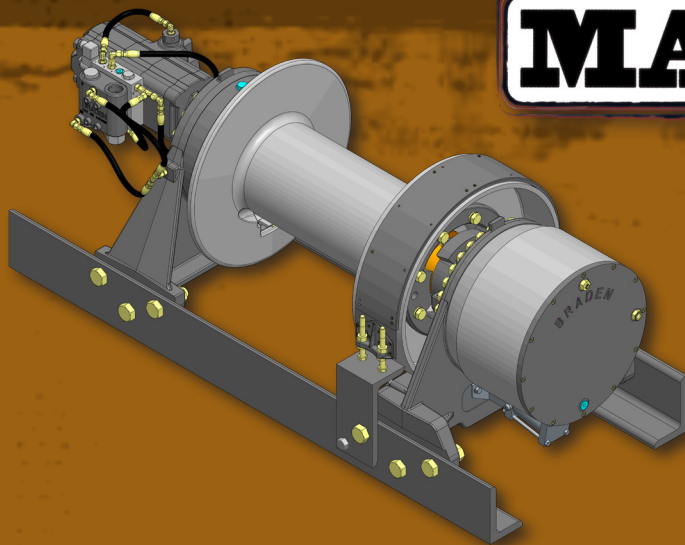

HP130A-130,000-POUND FIRST LAYER LINE PULL

## SPECIFICATIONS

### HP130A-157128/064-01

12.75/6.375 cu in. 2-Speed Gear Motor (209/104cc)  
 2702 PSI (186.4 BAR) @ 85 gpm (322 lpm)  
 Wire Rope Diameter: 1 1/4"

	LOW SPEED				HIGH SPEED			
	LINE PULL		LINE SPEED		LINE PULL		LINE SPEED	
	LB	KG	FPM	MPM	LB	KG	FPM	MPM
1	130,000	58,970	21	6	50,090	22,720	42	13
2	106,360	48,240	26	8	40,980	15,710	93	28
3	90,000	40,820	31	9	34,640	17,330	154	47
4	78,000	35,380	36	11	30,050	13,630	224	68

## WIRE ROPE CAPACITY

-01 DRUM CAPACITY [feet]\*  
 (9.00" B x 20.00" F x 20.00" W)

	1	2	3	4	5
1"	47	103	168	243	328
1 1/8"	42	93	154	224	
1 1/4"	38	86	142	209	

EST. WEIGHT 1700 lbs (771 Kg)

-01 DRUM CAPACITY [meters]\*  
 (229mm B x 508mm F x 508mm W)

	1	2	3	4	5
1"	14	31	52	74	100
1 1/8"	13	29	47	69	
1 1/4"	12	26	43	64	

\* All capacities above based on 90% of theoretical

**PACCAR** WINCH DIVISION  
 P.O. Box 547 Broken Arrow, Oklahoma 74013  
 PHONE: (918) 251-8511 FAX: (918) 259-1575  
[www.paccarwinch.com](http://www.paccarwinch.com)



Authorized Distributor:  
**Pacific Marine & Industrial**  
[www.pacificmarine.net](http://www.pacificmarine.net)  
[info@pacificmarine.net](mailto:info@pacificmarine.net)