

TL14 LED

Functional LED mirror lamp



Description

LED Mirror lamp for wall mounting above or on side of mirror. Rectangular design. Correct mirror lighting with soft light distribution. Robust, steel housing with spring operated plastic end caps. Powder coated white RAL9016. OP = Diffuser in Opal polycarbonate V0 quality. S = Switch, U = Universal razor socket with transformer and selector 230/110V. 300 HF replaces 8W tube, 800 HF replaces 15W tube and 1000 HF replaces 18W T8 tube. Due to latest LED technology the lamp is energy and maintenance saving.

Technical specifications

Application

Mirror lamp for wall mounting above or on side of mirror. Also available as berth lamp.

Design

Rectangular design Correct mirror lighting

Housing

Steel housing with spring operated plastic end caps

Finish

Powder coated white RAL9016

Optic

Opal polycarbonate diffuser in V0 quality

Electrical specification

With electronic driver 120-240V, 50-60Hz. Variants with two-pole switch (S), with universal shaver socket and transformer for 110/220V (U) or with Schuko socket (SC) are available.

Light Source

LED 300, 800, 1000 or 2000 lm, 830

Mounting

To be installed directly to wall or ceiling




Connection

One hole Ø19 mm with grommet in back. One knock-out Ø19 at top. One 3-way push in terminal block, 2 x 2.5 mm².



Illustrations

Product	Voltage	Frequency	Temperature Color	Optic	Variants	L (Mm)	C (Mm)	B (Mm)
TL14-W58 300HF	100~230V	50/60Hz	830/840/850	OP	S/SC/SSC	320	212	165
TL14-W58 800HF	100~230V	50/60Hz	830/840/850	OP	S/SC/SSC	490	370	260
TL14-W58 1000HF	100~230V	50/60Hz	830/840/850	OP	S/SC/SSC	641	521	319
TL14-W58 2000HF	100~230V	50/60Hz	830/840/850	OP	S/SC/SSC	1251	1131	625
TL14-W58 800HF	230V	50/60Hz	830/840/850	OP	U/SU	490	370	260
TL14-W58 1000HF	230V	50/60Hz	830/840/850	OP	U/SU	641	521	319
TL14-W58 2000HF	230V	50/60Hz	830/840/850	OP	U/SU	1251	1131	625
TL14-W58 800HF	110V	50/60Hz	830/840/850	OP	U/SU	490	370	260
TL14-W58 1000HF	110V	50/60Hz	830/840/850	OP	U/SU	641	521	319
TL14-W58 2000HF	110V	50/60Hz	830/840/850	OP	U/SU	1251	1131	625

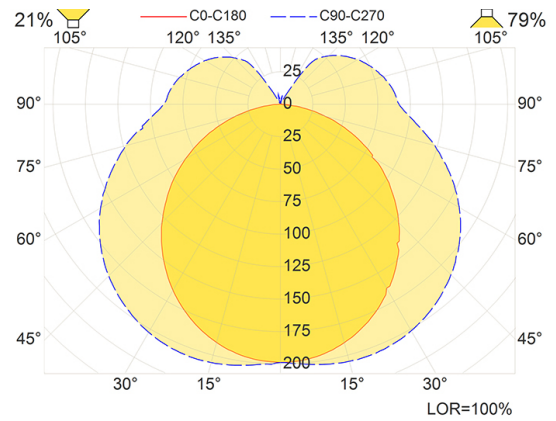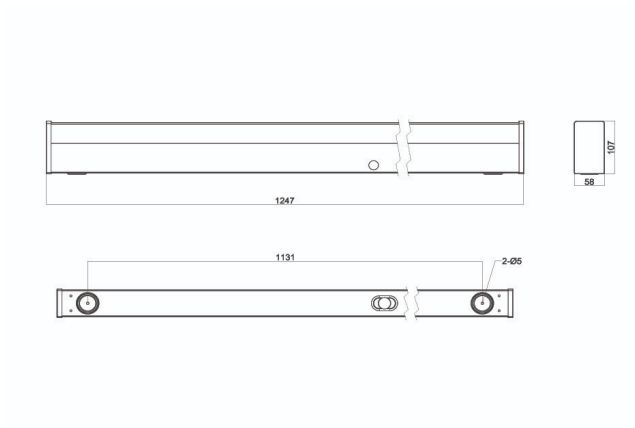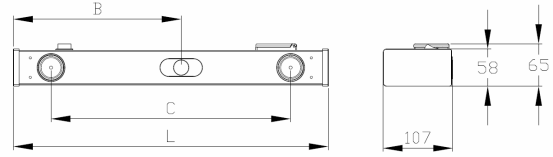




Spare Parts


End Cover
6001220701(2 pcs)



LED Driver

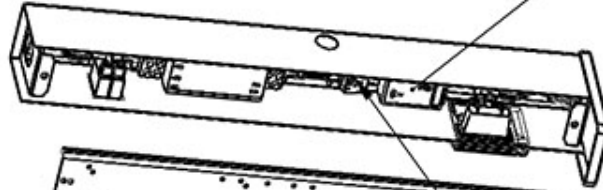

LED Linear

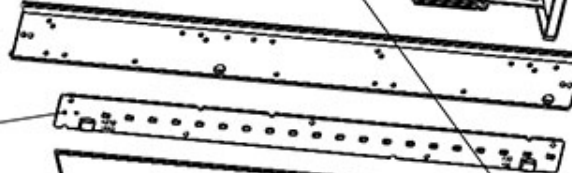

Diffuser, opal polycarbonate
300HF 6004010700
800HF 6004010701
1000HF 6004010702
2000HF 6004010703



Terminal block
6003510000(2 pcs)



Images

