


BLX C Bowlight

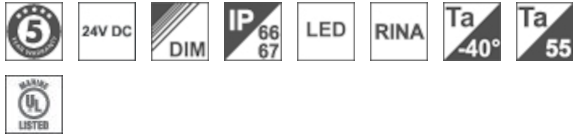

Description

BLX™ C LED BOWLIGHT is designed to improve the ability to see during navigation and maneuvering at night. By combining the proven technology of the BLX™ Series with practical testing of the optical features, the end result is a powerful bowlight that will increase safety and endure in very harsh environments.

Detects bouy reflex up to 0,5NM

Dimmable

RLX Design – compact, sealed and highly resistant to to shock and vibrations

Available in 24VDC and 100-277VAC (External PSU)

Encapsulated internal electronics

Maintenance Free

Instant light

Proven endurance

Easy clean design

Technical specifications

Initial lumious flux

Spot 8: 23.800 Spot 8 / Oval: 19.900

Light colour temperature

Spot 8: 5-8.000K Spot 8/Oval:5-8.000K

Color Rendering Index

min. 70



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

Beam angle

Spot 8: 8° Spot beam Spot 8/Oval: 8° Spot + 45×12° Oval beam

LN Candela (min-max) in 1.000

Spot 8: 640' Spot 8/Oval: 280'

Input voltage

22-30 VDC

Power consumption

250W


Ambient temperature (Ta)

- 40° C to + 55° C

Ingress protection

IP 66/67

Illustrations

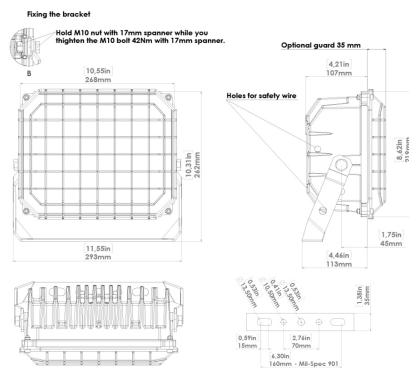

Images



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net