


BLX D Bowlight

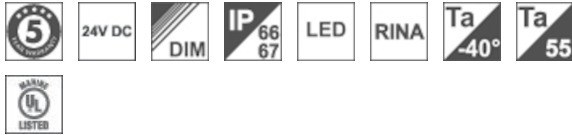

Description

BLX™ D LED BOWLIGHT is designed to improve the ability to see during navigation and maneuvering at night. By combining the proven technology of the BLX™ Series with practical testing of the optical features, the end result is a powerful bowlight that will increase safety and endure in very harsh environments.

Detects bouy reflex up to 1NM

Dimmable

RLX Design – compact, sealed and highly resistant to to shock and vibrations

Available in 24VDC and 100-277VAC (External PSU)

Encapsulated internal electronics

Maintenance Free

Instant light

Proven endurance

Easy clean design

Technical specifications

Initial lumious flux

48.800 (23.800+25.000)

Light colour temperature

5-8000K

Color Rendering Index

min. 70



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

Beam angle

8° spot + 45×12° / 8° spot + 8° spot

LN Candela (min-max) in 1.000

645' + 95' cd

LN Max. light intensity

1.487 cd/W

Input voltage

22-30 VDC

Power consumption

500W


Ambient temperature (Ta)

- 40° C to + 55° C

Ingress protection

IP 66/67

Illustrations

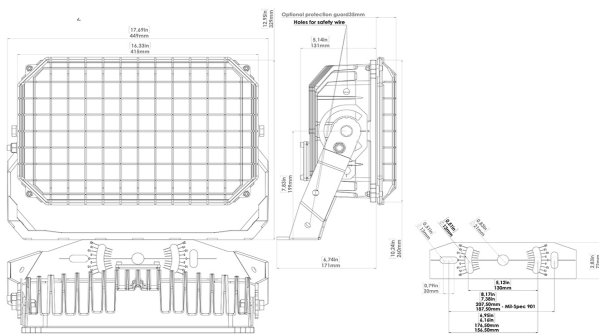

Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

Images



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net