




Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

1069

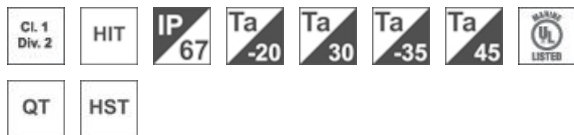

Description

Floodlights for metal halide (HI) , high pressure sodium (HS) or halogen with seamless housing of deep drawn stainless steel. The floodlights provide extreme corrosion resistance and high light output. For HI and HS type with integrated or external (type 1513 has to be ordered separately) ballast.

Approval UL 1598 & 1598A.

Technical specifications

Light Source

1069 008 / 009 / 018 - 021 / 028 - 031: HIT /HST max 400 W 1069 012 / 015 / 016/ 017: QT max 1000 W 1069 013/ 014: HST max 1000 W 1069 040: QT max 500 W

Housing

Seamless housing of deep drawn stainless steel bracket and housing stainless steel AISI 316. The housing is powder coated white and enamelled up to 70-80um thickness.

Electrical specification

All: External connection box with brass cable gland M24 x 1.5 MGCG for cable diameter of 10mm to 12.5mm. 1069 008 / 009/ 013 / 014 / 018 - 021 / 028 - 031: Including the igniter. Terminals for 6mm² external connection. Lamp base E39 1069 012 / 015 / 016 / 017 / 040: Lamp base RSC

Dimensions

1069 008 / 009 / 012 / 015/ 016 / 017: W: 210 H: 327 L: 495 1069 013 / 014: W: 210 H: 575 L: 84
 1069 018 - 021 / 028 - 031: W: 165 H: 548 L: 533 1069 040: W: 194 H: 326 L: 376

Images



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net