

RLX C Floodlight



Description

RLX C Floodlight is our smaller series floodlight that can replace 500W Halogen or smaller HPS/HMI lamps only by using 80W of power.

RLX™ C has like RLX™ D & RLX D Gen3 also the different beam options from 10-120 degrees, making RLX™ C able to give a good light impact also on long distances when choosing the most narrow beam options.

It is a compact and powerful light for small and mid-size vessels.

- Flicker Free
- Made to handle shocks and vibrations
- No maintenance
- Designed and produced in Scandinavia
- Compact, robust and sealed
- Excellent EMC characteristics
- Encapsulated internal electronics
- No ballast required
- Available for hazardous areas
- Corrosion glass C5m

Technical specifications

Initial lumious flux

10.776

Light colour temperature

5000

Color Rendering Index

min. 70

Beam angle

10 spot beam – 120 wide beam



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

Input voltage

100 - 277 VAC, 19 - 30 VDC

Power consumption

80W

Ambient temperature (Ta)

- 40° C to + 55° C


Ingress protection

IP 66/67



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

Illustrations

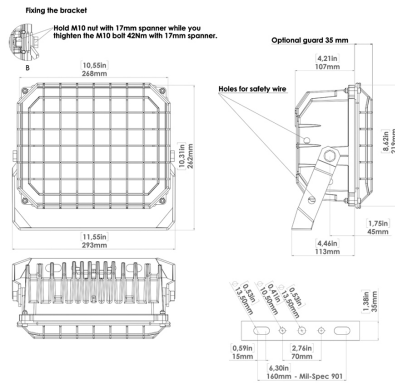

Images

