

RLX CXZ1.21 Floodlight



Description

RLX CXZ1.21 Floodlight is crafted to be appreciated from installation to end user, and is a compact LED floodlight for hazardous areas, both ATEX and IECEx zone 1, 2, 21 and 22. Light weight, simple termination and no flame path to maintain. It is made to last from the inside out and demands no attention.

Technical specifications

Initial lumious flux

6.589-19-021

Light colour temperature

5000

Color Rendering Index

min. 70

Beam angle

15°, 40°, 60°, 60×40, 80×60, 45×15

Input voltage

100-277VAC, 100-300VDC

Power consumption

40W, 80W, 120W and 160W

Ambient temperature (Ta)


- 40° C to + 55° C

Ingress protection

IP 66/67



Illustrations

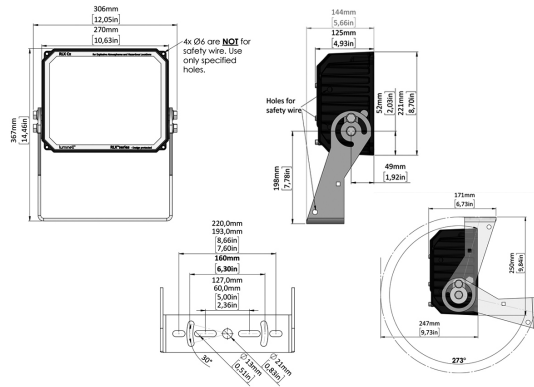



Images

