

DLT RT (M) 300 / 600 LED U

Lighting fixture for modular or T-profile
ceilings with UL certificate



Description

Ceiling luminaires are applicable for accommodation areas. They are designed to meet maritime requirements and UL approval. These lighting fixtures for ceilings with their high quality light distribution are easy to install and to maintain.

Available with LED light sources.

Recessed luminaire for mounting in modular, T-grid ceilings, ceilings with a concealed supporting grid or plasterboard ceilings. Steel luminaire housing with white epoxy/polyester powder coated paint finish. Can be delivered with optics as FR1, FR2, FR3 or FR4.

Technical specifications

Application

Interior, recessed mounted.

Housing

Aluzinc sheet steel. Epoxypowder coated, white RAL 9016.

Diffuser

Frame version (FR): Aluminium extrusion frame with a selection of different acrylic diffuser materials. FR1: Double prismatic acryl panel FR2: Acrylic opal panel FR3: White acrylic grid FR4: Mettallised acrylic grid in silver FR5: Double prismatic polycarbonate

Electrical specification

Flexible wiring, heat resistant to 105°C; through wiring up to 15A.

Cable entry

One ½" knockout in each end and back, others upon request.

Light Source

LED

Battery backup

Optional 90 minute or 3 hour battery backup. Other configurations available upon request.



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

Charge time after full discharge

24 h


Mounting

Designed for 600 mm inverted T-bar ceiling. Standard side mounting kid provided. A 300 mm version is also available.

Dimming


Available with dimmable driver.

Illustrations

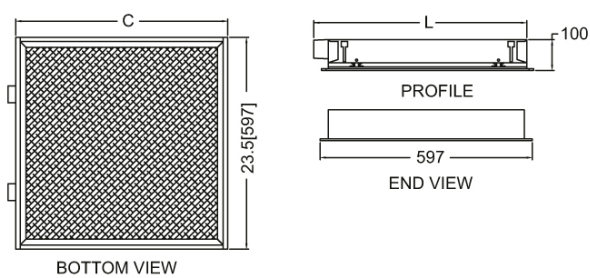

All Dimensions in mm

Images

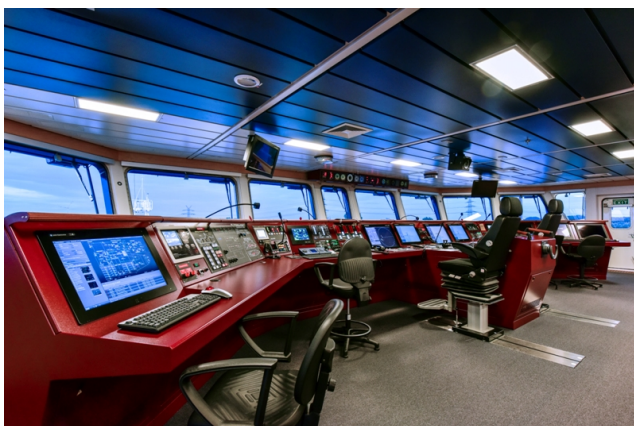

Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net