

# GIM RT (CM) 600 LED U

Interior luminaire, recessed



## Description

Ceiling luminaires are applicable for accommodation areas. They are designed to meet maritime requirements and UL approval. Lighting fixtures for ceilings with their high quality light distribution are easy to install and maintain. Some models have a wide range of optical systems and side profiles or frame for adaption to different ceiling types.

GIM ceiling luminaires are available with LED light sources.

Highlights:

Easy installation  
Ingress Protection IP44  
For use in 600 mm clip-in tile ceiling systems

## Technical specifications

### Application

Cabins, corridors, galleys, pantries, etc.

### Housing

Aluzinc sheet steel

### Finish

Epoxy powder coated, white RAL 9016.

### Diffuser

Clear prismatic acrylic diffuser, others on request.

### Electrical specification

Flexible wiring, heat resistant to 105°C; through wiring up to 15 A. Available with dimmable driver.

### Cable entry

Two ½" knockouts in each end, others upon request.

### Light Source

LED



Authorized Distributor:  
**Pacific Marine & Industrial**  
www.pacificmarine.net  
info@pacificmarine.net

### Battery backup

Optional 90-minute or 3 hour battery backup. Other configurations available upon request.


### Charge time after full discharge

24 hours.

### Mounting

Designed for use in a 600 mm "clip-in" tile ceiling system.

## Illustrations

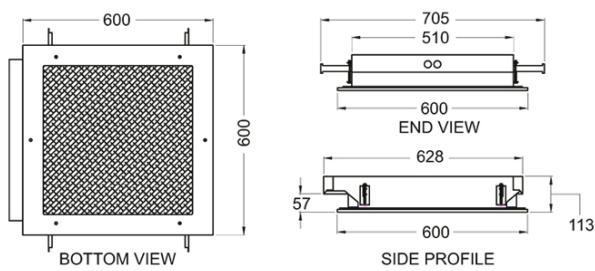

All Dimensions in mm

## Images



Authorized Distributor:  
**Pacific Marine & Industrial**  
[www.pacificmarine.net](http://www.pacificmarine.net)  
[info@pacificmarine.net](mailto:info@pacificmarine.net)