


BRADEN



Authorized Distributor:
Pacific Marine & Industrial
www.pacificmarine.net
info@pacificmarine.net

MODEL H55R

UP TO 60,000-POUND LINEPULL

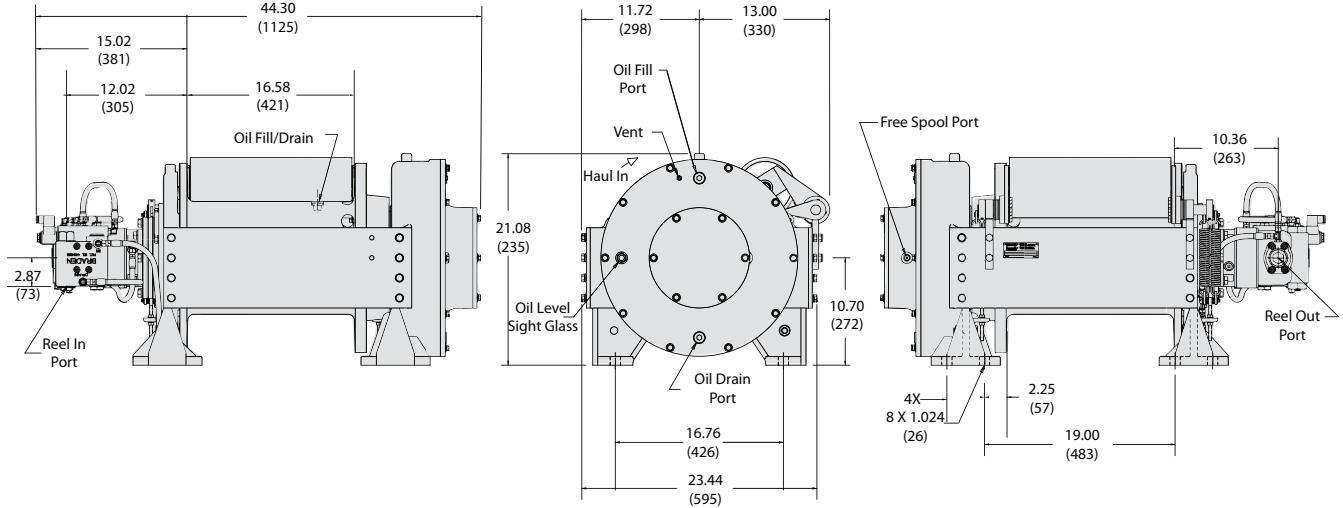

- 60,000 lbs. First Layer
- Free Spool
- Sprag Clutch
- 150:1 Ratio
- Two Speed Motor
- Weight 988 lbs.

H55R - 150080/040-01

LOW SPEED RINEER MOTOR

8.00 cu in. Motor (131.1 cc)
2604 PSI (179 bar) @ 35 gpm (132.4 lpm)
Wire Rope Diameter: 7/8"

	LINE PULL		LINE SPEED		ROPE CAPACITY	
	LB	KG	FPM	MPM	FT	M
1	60,010	27,220	20	6	54	16
2	52,480	23,804	23	7	116	35
*3	46,620	21,146	25	8	176	57
4	41,940	19,023	28	9	263	80

*Last legal layer per ANSI

H55R - 150080/040-01

HIGH SPEED RINEER MOTOR

4.00 cu in. Motor (65.5 cc)
2604 PSI (179 bar) @ 35 gpm (132.4 lpm)
Wire Rope Diameter: 7/8"

	LINE PULL		LINE SPEED		ROPE CAPACITY	
	LB	KG	FPM	MPM	FT	M
1	25,310	11,480	40	12	54	16
2	22,130	10,038	46	14	116	35
*3	19,660	8,917	51	16	186	57
4	17,690	8,024	57	17	263	80

*Last legal layer per ANSI

H55R - 150080-01 FS

LOW SPEED CHARLYNN 2000 MOTOR

8.00 cu in. Motor (131.1 cc)
2701 PSI (186 bar) @ 25 gpm (94.6 lpm)
Wire Rope Diameter: 7/8"

	LINE PULL		LINE SPEED		ROPE CAPACITY	
	LB	KG	FPM	MPM	FT	M
1	60,000	27,216	14	4	54	16
2	52,460	23,795	16	5	116	35
*3	46,610	21,142	18	5	186	57
4	41,930	19,019	20	6	263	80

*Last legal layer per ANSI

H55R - 150080-01 FS

HIGH SPEED CHARLYNN 2000 MOTOR

4.00 cu in. Motor (65.5 cc)
2701 PSI (186 bar) @ 25 gpm (94.6 lpm)
Wire Rope Diameter: 7/8"

	LINE PULL		LINE SPEED		ROPE CAPACITY	
	LB	KG	FPM	MPM	FT	M
1	30,000	13,608	28	9	54	16
2	26,230	11,897	32	10	116	35
*3	23,310	10,573	36	11	186	57
4	20,970	9,511	40	12	263	80

*Last legal layer per ANSI

LIT2444 R2 9-2009